



MS-2

The MS-2 actuator particularly fits to applications in the medical area such as physiotherapy couches, Care beds, patient-lifters, devices for disabled people, ... because it is powerful, fast and noiseless.

Motor type	Motor 24 VDC or 12 VDC
Protection grade	IP 54
Control box	CB-2 / CBP / other standard control boxes
Push force	6000 N maxi
Pull force	4000 N maxi
Duty cycle	2 mn operation / 18mn stand-by (10%)
Operating temperatures	+5° to +40°
Colour	Light grey (RAL 7035)

Options :

Mounting fork positioning	0° or 90°
Mounting fork material	Plastic or metallic
Protection grade	IP66
Mechanical safety	-Push Only -security nut
Intermediate stroke	3rd micro-switch
Memory/synchronisation function	With hall effect sensors

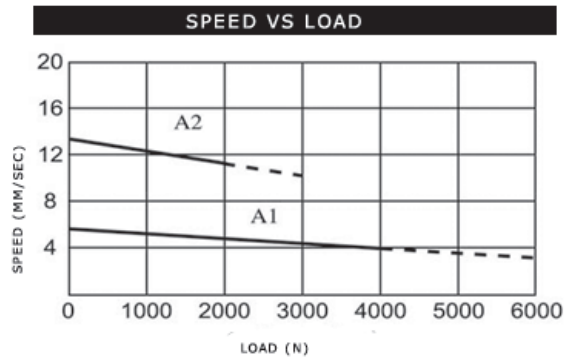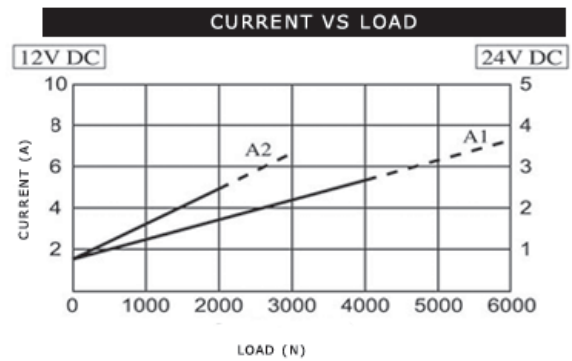

A1: single thread / A2: double thread

Dimensions :

	50mm	100mm	150mm	200mm	250mm	300mm
A - Stroke	50mm	100mm	150mm	200mm	250mm	300mm
B - Retracted length	228mm	278mm	338mm	388mm	448mm	498mm
Extended length (A+B)	278mm	378mm	488mm	588mm	698mm	798mm

Nota : other strokes upon request

