



MS-5

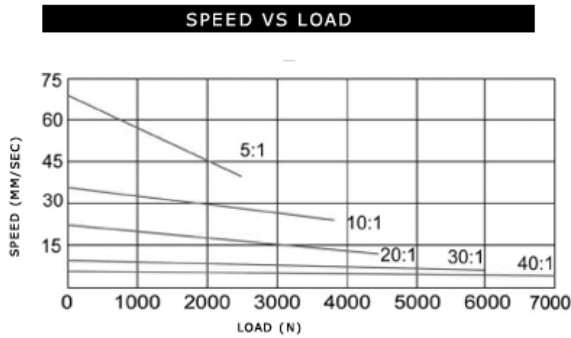

The actuator MS-5 is highly robust and efficient for working on agricultural and industrial applications in tough environments.

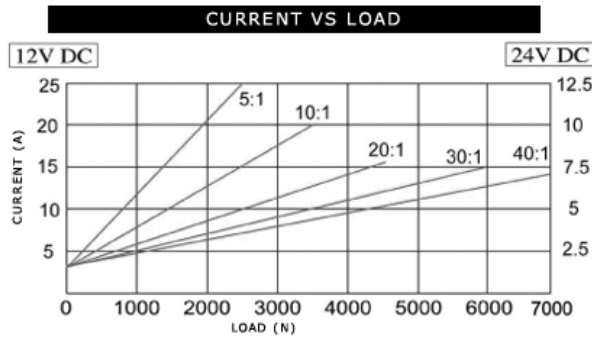

Motor type	Motor 24 VDC or 12 VDC
Protection grade	IP 54
Transmission	Ball screw
Push force	7000 N maxi
Pull force	7000 N maxi
Gear ratio / Power- speed	5 :1 / 10 :1 / 20 :1 / 30 :1 / 40 :1
Material of Thrust tube	Stainless steel
Duty cycle	5 mn operation / 20mn stand-by (25%)
Overload protection	By friction
Operating temperatures	-25° to +65°
Colour	Black


Options :

Electrical equipment	-adjustable end-switch -potentiometer
Protection grade	IP 65

Dimensions :

Stroke	100mm	150mm	200mm	300mm	450mm	600mm
A - Retracted length	342mm	392mm	444mm	545mm	775mm	927mm
B - Extended length	440mm	543mm	645mm	847mm	1232mm	1537mm

Nota : other strokes upon request

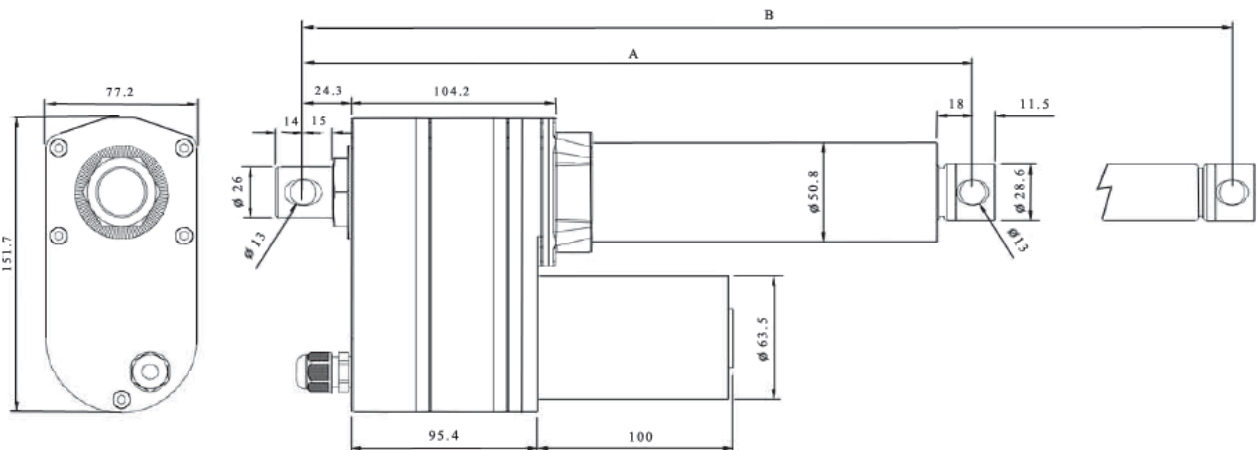

LINEAR ACTUATORS